

APPLICATIONS:

- Live sound systems
- DJ systems
- Touring rigs
- Installations
- Arenas and stadiums
- Houses of worship
- Rentals


FEATURES:

- 2 x 1500 Watts at 8 Ω bridged
- 4 x 550 Watts at 4 Ω
- 4 x 350 Watts at 8 Ω
- Efficient Class D power
- Lightweight, two rack-space design
- LED level and clip indicators
- Low pass filter
- Low-noise cooling fans

APX3000

All APX series amplifiers are Class D, meaning they are lightweight, have high dollar-per-watt ratios and are very efficient in converting available power into usable wattage without generating the type of heat associated with other designs. Each APX amplifier has balanced XLR/quarter-inch combo inputs that enable connection to balanced or unbalanced audio sources, while Speakon® NL-4 connectors and binding posts outputs provide for connection to virtually any passive speaker system.


The APX3000 weighs just 17.6 lbs. and provides continuous 4 x 350 watts at 8 ohms, 4 x 550 Watts at 4 ohms or 2 x 1500 Watts at 8 ohms bridged. Level and clip indicators provide easy monitoring of performance levels. The APX3000 also contains low-noise cooling fans to maintain optimal temperature and prevent overheating and features a high-efficiency low-noise switch-mode power supply for maximum output.

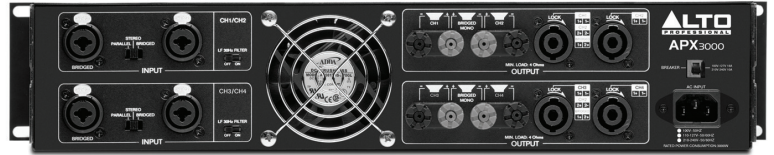


SPECIFICATIONS

Power Specifications:	Continuous power: 4 x 550 W at 4 ohms, 4 x 340 W at 8 ohms (0.5% THD) 2 x 1500 W at 8 Ohms (Bridged mono mode)
Input Sensitivity:	1.0 V
Input Impedance:	10 K Unbalanced
Frequency Response:	(at 10 dB below rated output power) 20 Hz - 25 kHz (+0/-3 dB)
Voltage Gain:	32 dB
Distortion:	(SMPTE-1M) <0.5%
S/N Ratio:	110 dB
Protection:	On/Off, mute, DC-fault, load
Front Controls:	AC power switch, 2 channel level control $-\infty$ to +30 dB
Rear Controls:	30 Hz high-pass filter on/off, bridge/stereo/parallel mode
Signal Indicators:	Signal present (green LED), clip (red LED), protection (red LED)
Power Indicators:	1 blue LED integrated with power switch
Input Connectors:	Balanced XLR-F / ¼" combo
Output:	Touch proof binding posts and Speakon® NL4 connectors
AC Power:	100 VAC, or 110 – 120 VAC, or 220 - 240 VAC (50 / 60 Hz)
Dimensions (WxLxH):	3.5" x 19" x 14.8" (89 mm x 483 mm x 376 mm)
Net Weight:	18.5 lbs (8.4 kg)


DIMENSIONS

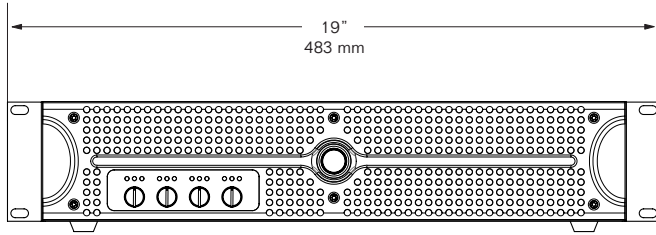

FRONT

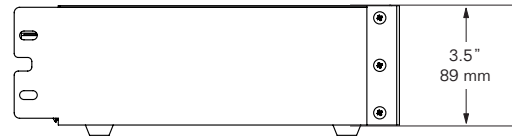

SIDE

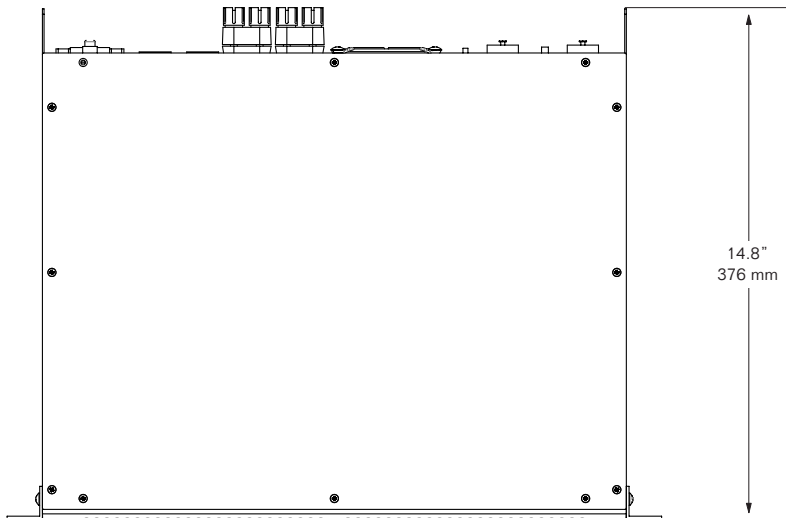

TOP

BACK PANEL

